



KONGERIKET NORGE
The Kingdom of Norway

NO 00/157

PCT/NO 00 0 00157

REC'D 31 MAY 2000	
WIPO	PCT

4

Bekreftelse på patentsøknad nr

Certification of patent application no

1999 2295

Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 1999.05.12

It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 1999.05.12

2000.05.18

Freddy Strømmen

Freddy Strømmen
Seksjonsleder

Ellen B. Olsen

Ellen B. Olsen



PATENTSTYRET
Styret for det industrielle rettsvern

+47 22970935

16

PATENTSTYRET

12MAI99 992295

Søker: Opticom ASA
Brynsveien 3B
N-0667 OSLO NORGE

Oppfinnere: 1) Tomas Granlund
Arrendegatan 23
S-583 31 Linköping Sverige

2) Tobias Nyberg,
Solrosgatan 4A
S-582 46 Linköping Sverige

3) Olle Inganäs
Wernersgatan 13
S-582 46 Linköping Sverige

Fullmektig: Geirr I. Leistad i Opticom ASA

**Oppfinnelsens
tittel:** Fremgangsmåter for mønstring av polymerfilmer og
anvendelse av fremgangsmåtene

The present invention concerns a method of patterning a polymer film forming a coating on a material surface, wherein the patterning takes place by means of a stamp having a surface with at least one indentation formed therein, and a method for transferring a pattern polymer film onto a material surface by means of a stamp having a surface with at least one indentation formed therein. The invention also concerns the use of methods of this kind.

The use of conjugated polymers in electronic devices requires means for processing them into patternable thin films. Patterning conducting electrodes and semiconducting polymers in polymer diodes requires patterning of all materials, at a resolution of 0.1-50 μm . This can possibly be accomplished by the use of classical photolithography with help of photoresists, but several new problems arises in the chemical etching of the material and the chemical compatibility with conventional photoresists. It would therefore be desirable to pattern this material with non-photolithographic techniques.

A new method for patterning is based on elastomeric stamps. Patterning of a surface here requires conformal contact between the stamp and surface. Many variants of these techniques are documented, in particular in the work from G. Whitesides' group at Harvard University (refs. 1, 2).

The work of Whitesides' group is disclosed in US patent No. 5 512 131, titled "Formation of microstamped patterns on surfaces and derivative articles" (Kumar & Whitesides). This prior art document discloses a method of patterning a material surface, comprising steps of providing a stamp having a surface including at least one indentation formed therein, said indentation configured with a stamping surface defining a first pattern; coating said stamping surface with a molecular species terminating at the first end in a functional group selected to bind to said material; processing said stamping surface in a first orientation and contacting a portion of said material surface with said stamping surface to hold said molecular species against said material surface portion to allow said functional group to bind thereto; and removing said stamping surface to provide a self-assembled molecular species on said material surface according to said first pattern in said first orientation.

This prior art disclosure amounts to a process wherein a chemical species capable of forming a self-assembled monolayer is coated onto the stamping surface of an elastomeric stamp, said species having a functional group

selected to bind to a particular material. The stamping surface is placed against a surface of a material surface and removed to leave a self-assembled monolayer of the species according to the stamping surface pattern of the stamp.

- 5 Further there are known a number of different prior art techniques for patterning surfaces or materials deposited thereon without having to resort to conventional photolithography.

As a further example of prior art a paper by Zhang, L.G.; Liu, J.F. and Lu, Z.H., titled "Microfabrication on polymer with a contact procedure",
10 Supramolecular Science, Vol. 5, Nos. 5-6:713-715 (Oct-Dec. 1998) discloses the fabrication of thickness-contrast micropatterns based on a contact procedure. Polymer (polydimethylsiloxane) micropost arrays are fabricated with grids as the masters. This contact procedure, which does not rely on etching, extends the present limits of microfabrication. In addition the
15 thickness-contrast micropatterns on the polymer can be replicated to other substrates, such as silicon wafers, with microcontact printing.

These techniques that are collected in the catchall term soft lithography are based on pattern transfer by a soft rubber stamp in direct contact with the surfaces and materials to be patterned. Soft lithography includes
20 microcontact printing (μ CP), replica molding (REM) and micromolding in capillaries (MIMIC). The patterning technique is based on physical contact, not the projection of light through a mask, as in photolithography. The fundamental limits to resolution are due to the range of the van der Waals forces determining the interaction of surfaces (~ 10 nm), not the diffraction of
25 light in far-field geometries (~ 0.5 μ m).

An important element of microcontact printing (μ CP) is the formation, by selfassembly, of a monomolecular layer of etch resistant organic molecules. Alkanethiols are the preferred species, which chemisorb into molecular thin films on Au, Ag, Cu and other metal surfaces. They form layers of very small
30 thickness (1-3 nm) which are tightly bound (but can be desorbed at high temperatures and by exchange). These alkane layers are used as the resist; a metal layer is protected from etching below the molecular film, and where it is not deposited the metal is removed. The patterning of the resist layer is in its turn done with molecular stamps. A poly(dimethylsiloxane) (PDMS) layer,
35 patterned with protruding and recessed elements in a prior step, is exposed to

a solution of alkanethiols; the rubbery stamps are pressed onto a surface for a short time; alkanethiols react with the gold surface when close contact is obtained; and a pattern of protected and non-protected Au is obtained. This layer is now exposed to another alkanethiol, adsorbing from solution onto the unprotected gold surface. A patterned layer is obtained. The process is called microcontact printing (μ CP). It has been established that formation of the patterned structure occurs within a few seconds.

The patterned layer may now be used as ultrathin resists in selective wet etching, or as templates for the control of wetting, dewetting, nucleation and growth or deposition of other materials. Minimal sizes of 35 nm trenches in Au layers have been obtained with etching techniques.

Patterned self-assembled monolayers (SAMs) allow control of the local hydrophobic/hydrophilic nature of the surface, and therefore act to control the deposition of materials. Water will condense on the hydrophilic part of the surface; this allows us to deposit materials from water solution onto a patterned surface in a regular fashion. Likewise, organic polymers may be deposited onto the hydrophobic surfaces from organic solvents. Both these approaches allow the formation of patterned structures of deposited material. Selective chemical vapour deposition (CVD) processes onto SAMs controlling the nucleation behaviour is another approach for pattern formation in ceramics and metals. Proteins and cells can be selectively adsorbed on patterned surfaces.

It is easy to pattern non-planar surfaces with this approach, a near impossibility with photolithography. Capillaries of radius of curvature 50 μ m have been patterned with structures of dimensions down to a few microns. This enables the construction of more complex structures on patterned and non-planar surfaces, relieving one of the tyranny of planar photolithography.

The microcontact printing is simple, inexpensive and flexible. With bigger structures (>20 μ m) clean room facilities are not necessary. The stamp can be used and reused many times, providing high fidelity reproduction. Because the master structure is normally used as a template to prepare "negatives" (as it were), one can form many identical stamps from a single master, and each one of them can be used some hundred times - multiple copying and parallel processing of the structures is therefore possible. The capital cost of producing the structures is very low. The fabrication of masters of course

requires other lithographical techniques, such as photolithography or electron beam lithography, but the multiplication of stamps gives parallel production lines. Micromolding is a small twist to classical molding in that a soft and flexible silicone rubber is used, rather than a hard mold. The elasticity and low surface energy of this mold material allows it to be removed easily from the prepared structure. Replica-molding (REM) can be obtained down to the 30 nm dimensions. Such methods may be used to prepare optical structures as in gratings, microlenses, Fresnel lenses and similar designs for the diffraction and refraction of light. Microprinting is best obtained with the technique named micro-transfer molding (μ TM) where a patterned mold is filled with a liquid prepolymer, excess liquid removed and the mold pressed against a surface, irradiated or heated to polymerize. After the liquid precursor is converted into a solid, the mold is peeled away. In a slight modification of this technique (micromolding in capillaries, MIMIC) connected structures are placed in contact with low viscosity liquids, which fill the channels by capillary action. These liquids may carry nanoparticles, or solutions for solgel conversion, or polymers in solution. After conversion of the liquid to a solid, the mold is removed. Processing of the resulting structure by photochemistry or thermal treatment is now possible, for instance converting a precursor to carbon materials. The remaining structure may now be the functional element - such as an optical waveguide - or a resist to be used to etch the underlying material. In a slight twist to this method, SAMIM (solvent assisted MIMIC), a solvent is used to modify the sample surface to be patterned, and the patterned is defined with a micromold in which the structure is defined.

The very important aspect of faithful reproduction over large areas and with low defect density is not yet fully resolved. In a recent report from IBM Zurich, it is claimed that structures of 1 micrometer pitch were faithfully replicated without defects over areas of 10 cm^2 , using μ CP or MIMIC.

Patterning of monolayers of molecules is the most elegant and novel of these prior art methods, but is limited to transfer of monolayers, subsequently used for etch resists and surface activating elements. Transfer of polymer patterns is normally done with MIMIC and microcontact printing. In MIMIC a polymer precursor is patterned by filling channels defined by applying a stamp onto a surface; in microcontact printing a polymer (precursor) fills the channels turned upside down, in such a way as to form the structure which is

then transferred to the surface. Transfer of polymer layers to functionally modified surfaces has been reported (ref. 3).

5 The patterning of polymers, and in particular conjugated polymers has been reported (refs. 4,5) using hydrophobic/hydrophilic modification of monomer
adhesion. It may be difficult to deposit high quality polymers from
dispersions and solutions with the materials used in these stamps; in
particular, the swelling of a poly(dimethylsiloxane) stamp in chloroform
prevents the patterning of many of the luminescent polymers used for
electroluminescent polymer displays where patterning is desired. These
10 polymers are often solvated in solvents such as chloroform. Likewise, the
patterning of water-soluble polymers prohibits the use of some soft
lithography techniques, such as MIMIC (refs. 1, 2) as the solvent is required
to pass through an elastomeric membrane. Chloroform will swell the stamp,
and destroy the fine pattern to be transferred; in the other extreme, water is
15 not easily transported through the extremely non-polar elastomeric stamp,
and pattern transfer will be prohibited. Novel patterning methods are
therefore desired.

In regard of certain drawbacks and limitations of the above-mentioned prior
art methods, it is thus an object of the present invention to provide methods
20 whereby patterns can be generated in thin films of polymer deposited on
material surface by a simple and inexpensive technique based on the use of a
specially designed stamp for generating the patterns. Particularly it is another
object of the present invention to be able to pattern thin film of polymers
which initially form continuous layers and moreover exhibit advantageous
25 electronic or optical properties, e.g. for use as pattern electrodes or pixels in
optoelectronic displays.

Finally, it is also an object of the invention to provide patterned thin films of
polymer on a substrate in order to facilitate specific processing of the
substrate.

30 The above-mentioned objects and advantages are realized according to the
invention with the method characterized by depositing onto the material
surface a thin film of polymer, applying to the material surface the stamp
made of an elastomeric material in conformal contact with the surface of the
thin film, such that portions thereof contacting one or more protruding
35 elements of the elastomeric stamp formed by the at least one indentation

thereof, are attached to the protruding element or elements and removed from the material surface with the stamp, or a method characterized by depositing onto the stamp surface a thin film of polymer, applying the stamp made of an elastomeric material in conformal contact with the material surface, such that
5 the thin film of polymer is transferred thereto from one or more protruding elements of the elastomeric stamp formed by the at least one indentation thereof, and leaving a patterned thin film of polymer on the material surface when removing the stamp therefrom as well as with the use of the methods to provide a patterned etch resist in the form of a thin film layer of polymer on a
10 gold layer, whereby the gold layer can be removed by etching of the area and unprotected by the resist, the polymer preferably being PEDOT.

Further features and advantages of the method according to the invention are apparent from the appended dependent claims.

The invention shall now be described in a general manner and in connection
15 with the appended drawing figures in case of one of the methods, as well as with a reference to exemplary embodiments of both the methods.

In the drawing figures,

fig. 1 shows the deposition of a thin film of polymer on a substrate,
fig. 2 the application of a stamp to the thin film polymer, and
20 fig. 3 schematically the patterning of the thin film of the polymer.

A particular polymer of great interest in these devices is the poly(3,4-dioxoethylenethiophene) (PEDOT) which is a commercial polymer from Bayer AG. It is produced in the form of an aqueous dispersion, and can be coated, e.g. spin-coated onto a surface to form a thin film. This film has
25 very attractive properties for polymer electronic devices as it for instance enhances the stability and efficiency of polymer light emitting diodes, or the hole collection in polymer photodiodes, or the hole injection in metal/PEDOT/polymer structures. It is, however, difficult to pattern this polymer dispersion with the hydrophobic polydimethylsiloxane (PDMS)
30 stamp in the MIMIC method. Thus the present invention provides alternative methods of patterning PEDOT films.

One of the requirements for the use of this patterned film is that sufficient electrical conductivity can be obtained to allow the polymer to be used as the electrode in devices. Surprisingly, the patternable film is obtained with

similar additives which has been shown to give enhanced electrical conductivity, up to 80 S/cm, after thermal curing.

5 In these methods according to the present invention, a film of modified PEDOT is deposited on the surface to be patterned by spin coating, and patterning is done by removing parts of the film with a suitable elastomer stamp. This is the first method according to the invention and shall subsequently be termed "Lift-up". In the alternative method, a modified PEDOT layer is deposited on the stamp and then transferred onto the surface to be patterned. This is the second method according to the invention and
10 subsequently termed "Put-down".

These methods are superior to prior art in that they allow patterning of very large areas on (non-planar) surfaces. It is documented in the literature (refs. 1, 2) that polymers can be deposited onto surfaces in patterns with MIMIC, in which indentations in a stamp act as channels to allow capillary filling with
15 some polymer solution or precursor polymer. This requires that all areas to be filled are connected; an isolated pixel cannot be filled by capillary action. MIMIC will also require long filling time, as the size of channels is reduced and length increased. It is therefore not suited for reel-to-reel production. Both the methods according to the invention are in principle compatible with
20 reel-to-reel production, and also allow the patterning of isolated structures.

They are also superior in that the patterning of the polymer layer does not (necessarily) require the previous patterning of the surface, as for instance in (refs. 4, 5), and that polymers, not monomers, are deposited.

25 The preparation of the modified polymer is done in order to tune the cohesive energy of the film, which has to allow the rupturing of the film in both methods; it is also done to tune adhesion to the substrate and/or stamp. The internal cohesion of the film is modified by adding low molecular species in the present case, but could in general be any additive giving this function. It is, of course, essential that the additives are in no way detrimental to the
30 function of the layer, and in the present case the additives are actually beneficial to the function.

When considering the advantages of these methods, we note that Lift-up and Put-down are complementary in the sense that where the former fails, the latter should work. Poor adhesion of the film to be patterned to the substrate

suggests that Lift-up should be used; poor adhesion to the stamp suggests that Put-down could be used.

5 In Lift-up, the polymer film transfer between stamp and surface is used to pick up parts of a PEDOT film from a substrate, by attaching an elastomeric stamp onto the thin film of PEDOT on a fully covered substrate. The molecular contact between film and stamp breaks up the film, and it can now be micropatterned to any topology by this method. The PEDOT film will also now be prepared with the help of additives, and after transfer the film is cured/converted to a higher conductivity by thermal treatment. Features of
10 dimensions down to 10 μm can easily be patterned. One of the advantages of this technique as compared to MIMIC is that isolated PEDOT pixel can be defined. In this method no solvent is used, which increases the number of materials that can be patterned.

15 Specifically fig. 1 relates to the lift-up and shows how a PEDOT film is spin deposited on the substrate. In a second step shown in fig. 2 a plasma etched poly(dimethylsiloxane) stamp is applied to the thin film and simultaneously heated. The stamp may be plasma etched to obtain an adhesion between the thin film and the stamp which is stronger than the adhesion between the thin film and the substrate. In the subsequent and final step in the Lift-up process,
20 shown in fig. 3, the stamp is lifted and the thin-film polymer in the form of PEDOT adheres to the protruding portion of the stamps, such that the pattern is formed in the thin film PEDOT on the substrate when the stamp is removed.

25 In Put-down a slightly modified PEDOT dispersion is coated onto an elastomeric stamp by spin coating. By adding a low molecular weight compound such as ethylene glycol, glycerol or sorbitol in the dispersion, the surface remains sticky enough to attach to another surface brought close. For structures with a large enough spacing between the protruding parts this is sufficient to transfer the PEDOT residing on the upper edge of the structure
30 onto a mating surface, at the right temperature and pressure. With the use of the Put-down method one may be able to transfer films with structures smaller than 100 μm . This method has the added advantage that no limitation to the topology is caused from the filling of channels with liquid, such as in the MIMIC process. There is also the advantage that the surface to be coated
35 does not need to be planar; actually non-even surfaces can be handled.

It shall now be examples of particularly preferred embodiments according to the invention, including both the lift-up and the put-down processes.

Example 1: Lift-up

Poly(3,4-dioxymethylenethiophene)-polystyrenesulfonate (PEDOT-PSS) (Baytron from Bayer AG) is mixed with glycerol to make a 1:2 weight ratio mixture. The mixture is spin-coated into a thin continuous layer on a glass surface. An elastomer stamp formed in poly(dimethylsiloxane) (Sylgard 184, Dow Corning) is plasma-treated for 10 to 30 s in an oxygen plasma. The relief-patterned stamp is brought in conformal contact with the layer, which is then heated to 50-100° C for 15 to 60 s and subsequently removed with the removal of the elastomer stamp. – As an alternative to glycerol sorbitol could be used, but apparently sorbitol mixed PEDOT-PSS works poorly if at all with Lift-up.

Example 2: Lift Up

PEDOT-PSS (Baytron from Bayer AG) is mixed with glycerol to make a 1:1 weight ratio mixture. The mixture is spin-coated into a thin continuous layer on a glass surface. An elastomer stamp formed in poly(dimethylsiloxane) (Sylgard 184, Dow Corning) is plasma-treated for 10 to 30 s in an oxygen plasma. The relief-patterned stamp is brought in conformal contact with the layer, which is then heated to 50-100° C for 15 to 60 s and subsequently removed with the removal of the elastomer stamp.

Example 3: Put-down

PEDOT-PSS (Baytron from Bayer AG) is mixed with ethylene glycol to make a 1:1 molar ratio mixture. An elastomer stamp formed in poly(dimethylsiloxane) (Sylgard 184, Dow Corning) is plasma-treated for 10 s in an oxygen plasma. The relief-patterned stamp is dipped into the mixture and dip-coated. It is brought in conformal contact with an ITO surface and part of the layer is deposited from the stamp onto the ITO, leaving a layer of patterned PEDOT-PSS mixture.

Example 4: Put-down

PEDOT-PSS (Baytron from Bayer AG) is mixed with ethylene glycol to make a 1:1 molar ratio mixture. An elastomer stamp formed in poly(dimethylsiloxane) (Sylgard 184, Dow Corning) is plasma-treated for 10 s in an oxygen plasma. The relief-patterned stamp is dip-coated with the mixture. It is brought in conformal contact with an Au surface and part of the

layer is deposited from the stamp onto the Au, leaving a layer of patterned PEDOT-PSS mixture.

Example 5: Put-down

5 PEDOT-PSS (Baytron from Bayer AG) is mixed with glycerol to make a 1:1 molar ratio mixture. An elastomer stamp formed in poly(dimethylsiloxane) (Sylgard 184, Dow Corning) is plasma-treated for 10 s in an oxygen plasma. The relief-patterned stamp is dip-coated with the mixture. It is brought in conformal contact with a Cu surface and part of the layer is deposited from the stamp onto the Cu, leaving a layer of patterned PEDOT-PSS mixture.

10 Example 6: Put-down

PEDOT-PSS (Baytron from Bayer AG) is mixed with glycerol to make a 1:1 molar ratio mixture. An elastomer stamp formed in poly(dimethylsiloxane) (Sylgard 184, Dow Corning) is plasma-treated for 10 s in an oxygen plasma. The relief-patterned stamp is dip-coated with the mixture. It is brought in
15 conformal contact with a glass surface and part of the layer is deposited from the stamp onto the glass, leaving a layer of patterned PEDOT-PSS mixture.


Example 7: Put-down

PEDOT-PSS (Baytron from Bayer AG) is mixed with glycerol to make a 1:1 molar ratio mixture. An elastomer stamp formed in poly(dimethylsiloxane) (Sylgard 184, Dow Corning) is plasma-treated for 10 s in an oxygen plasma. The relief-patterned stamp is dip-coated with the mixture. It is brought in conformal contact with an Au surface and part of the layer is deposited from the stamp onto the Au, leaving a layer of patterned PEDOT-PSS mixture. The decorated Au surface is exposed to an etchant (gold etch solution: 5g I₂, 10 g
25 KI dissolved in 250 ml H₂O) to remove the unprotected Au layer.

References

1. Y. Xia and G. Whitesides, Soft lithography, *ANGEWANDTE CHEMIE-INTERNATIONAL EDITION IN ENGLISH*, **37**(5), (1998) 551-575.
- 30 2. Y. Xia and G. Whitesides, Soft lithography, *ANNUAL REVIEW OF MATERIALS SCIENCE*, **28**, (1998) 153-184.

3. L. Yan, W.T.S. Huck, X.M. Zhao, and G.M. Whitesides, Patterning thin films of poly(ethylene imine) on a reactive SAM using microcontact printing, *LANGMUIR*, 15(4), (1999) 1208-1214.
4. Z. Huang, P.C. Wang, J. Feng, A.G. MacDiarmid, Y. Xia, and G.M. Whitesides, Selective deposition of films of polypyrrole, polyaniline and nickel on hydrophobic/hydrophilic patterned surfaces and applications, *SYNTHETIC METALS*, 85(1-3), (1997) 1375-1376.
5. Z.Y. Huang, P.C. Wang, A.G. MacDiarmid, Y.N. Xia, and G. Whitesides, Selective deposition of conducting polymers on hydroxyl-terminated surfaces with printed monolayers of alkylsiloxanes as templates, *LANGMUIR*, 13(24), (1997) 6480-6484.



PATENT CLAIMS

1. A method of patterning a polymer film forming a coating on a material surface, wherein the patterning takes place by means of a stamp having a surface with at least one indentation formed therein, characterized by
5 depositing onto the material surface a thin film of polymer, applying to the material surface the stamp made of an elastomeric material in conformal contact with the surface of the thin film, such that portions thereof contacting one or more protruding elements of the elastomeric stamp formed by the at least one indentation thereof are attached to the protruding element or
10 elements and removed from the material surface with the stamp.
2. A method according to claim 1, characterized by modifying the polymer film by incorporating additives in order to reduce the cohesive binding of the polymer film.
15
3. A method according to claim 2, characterized by an additive being a water-soluble organic compound.
4. A method according to claim 2, characterized by an additive being
20 selected among ethylene glycol, poly(ethylene glycol), glycerol, sorbitol or any combination thereof.
5. A method according to claim 1, characterized by the polymer film being a water-soluble or dispersed polymer.
25
6. A method according to claim 1, characterized by the polymer being a conducting conjugated polymer in its doped or undoped state.
7. A method according to claim 1, characterized by the polymer being
30 poly(3,4-dioxyethylenethiophene) (PEDOT) or deriving from a copolymer thereof or one or more mixtures incorporating the monomer (EDOT) form.
8. A method according to claim 1, characterized by modifying the material surface in order to provide a weak adhesion between the material
35 surface and the polymer film to be removed therefrom.

9. A method, according to claim 8, characterized by modifying the material surface by plasma etching.

5 10. A method according to claim 1, characterized by modifying the elastomer stamp surface in order to provide a strong adhesion between the stamp and the polymer film to be attached thereto.

11. A method according to claim 9, characterized by modifying the elastomer stamp surface by plasma etching.

10

12. A method according to claim 1, characterized by enhancing the adhesion between stamp and the polymer film by means of additives to the latter.

15

13. A method according to claim 12, characterized by an additive being glycerol.

20

14. A method of transferring a patterned polymer film onto a material surface by means of a stamp having a surface with at least one indentation formed therein, characterized by depositing onto the stamp surface a thin film of polymer, applying the stamp made of an elastomeric material in conformal contact with the material surface, such that the thin film of polymer is transferred thereto from one or more protruding elements of the elastomeric stamp formed by the at least one indentation thereof, and leaving a patterned thin film of polymer on the material surface when removing the stamp therefrom.

25

15. A method according to claim 14, characterized by modifying the polymer film by incorporating additives in order to reduce the cohesive binding of the polymer film.

30

16. A method according to claim 15, characterized by an additive being a water soluble organic compound.

35

17. A method according to claim 15, characterized by an additive being selected among ethylene glycol, poly(ethylene glycol), glycerol, sorbitol, polyol or any combinations thereof.

18. A method according to claim 14, characterized by the polymer film being a water-soluble or dispersed polymer.

5 19. A method according to claim 14, characterized by the polymer film being a conducting conjugated polymer in its doped or undoped state.

10 20. A method according to claim 14, characterized by the polymer being poly(3,4-dioxyethylenethiophene) (PEDOT) or deriving from a copolymer thereof or one or more mixtures incorporating the monomer (EDOT).


21. A method according to claim 2, characterized by modifying the elastomer stamp surface in order to provide a weak adhesion between the elastomer surface and the polymer film to be removed therefrom.

15 22. A method according to claim 21, characterized by modifying the elastomer stamp surface by plasma etching.

20 23. A method according to claim 2, characterized by modifying the material surface in order to provide a strong adhesion between the material surface and the polymer film to be transferred thereto.

24. A method according to claim 23, characterized by modifying the material surface by plasma etching.

25 25. The use of a method according to claim 1 or 14 to provide a patterned etch resist in the form of a thin film of polymer on a gold layer, whereby the gold layer can be removed by etching of the area unprotected by the resist, the polymer preferably being PEDOT.



ABSTRACT

In a method of patterning a polymer film forming a coating on a material surface, a thin film of polymer is deposited on the surface and the
5 patterning takes place by applying to the material surface a stamp made of an elastomeric material in conformal contact with the surface of the thin film, such that portions thereof contacting one or more protruding elements of the elastomeric stamp
10 formed by one or more indentations thereof, are attached to the protruding element or elements and removed from the material surface with the stamp.

In a method of transferring a patterned polymer film onto a material surface, a thin film polymer is
15 deposited on a stamp surface and the stamp is applied in conformal contact with the material surface, such that thin film of polymer is transferred thereto from one or more protruding elements of the elastomeric stamp formed by at
20 least one indentation thereof, thus leaving a patterned thin film of polymer on the material surface when removing the stamp therefrom.

Use for patterning an etched resist in the form of a thin film of polymer on a gold layer.





Fig. 1 Spinn Pedot film on substrate

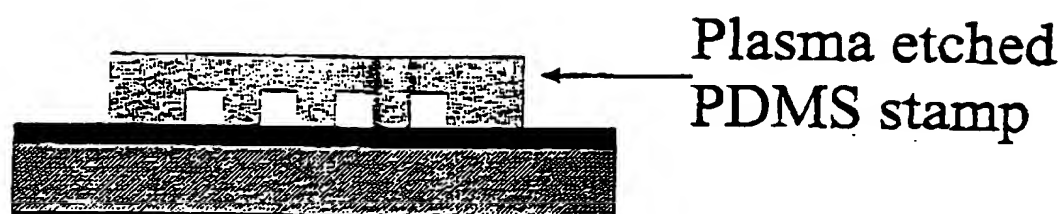


Fig. 2 Apply stamp and heat

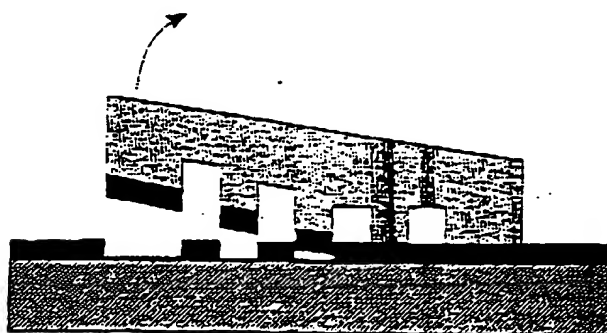


Fig. 3 Peel off stamp and stamp-adhered Pedot

